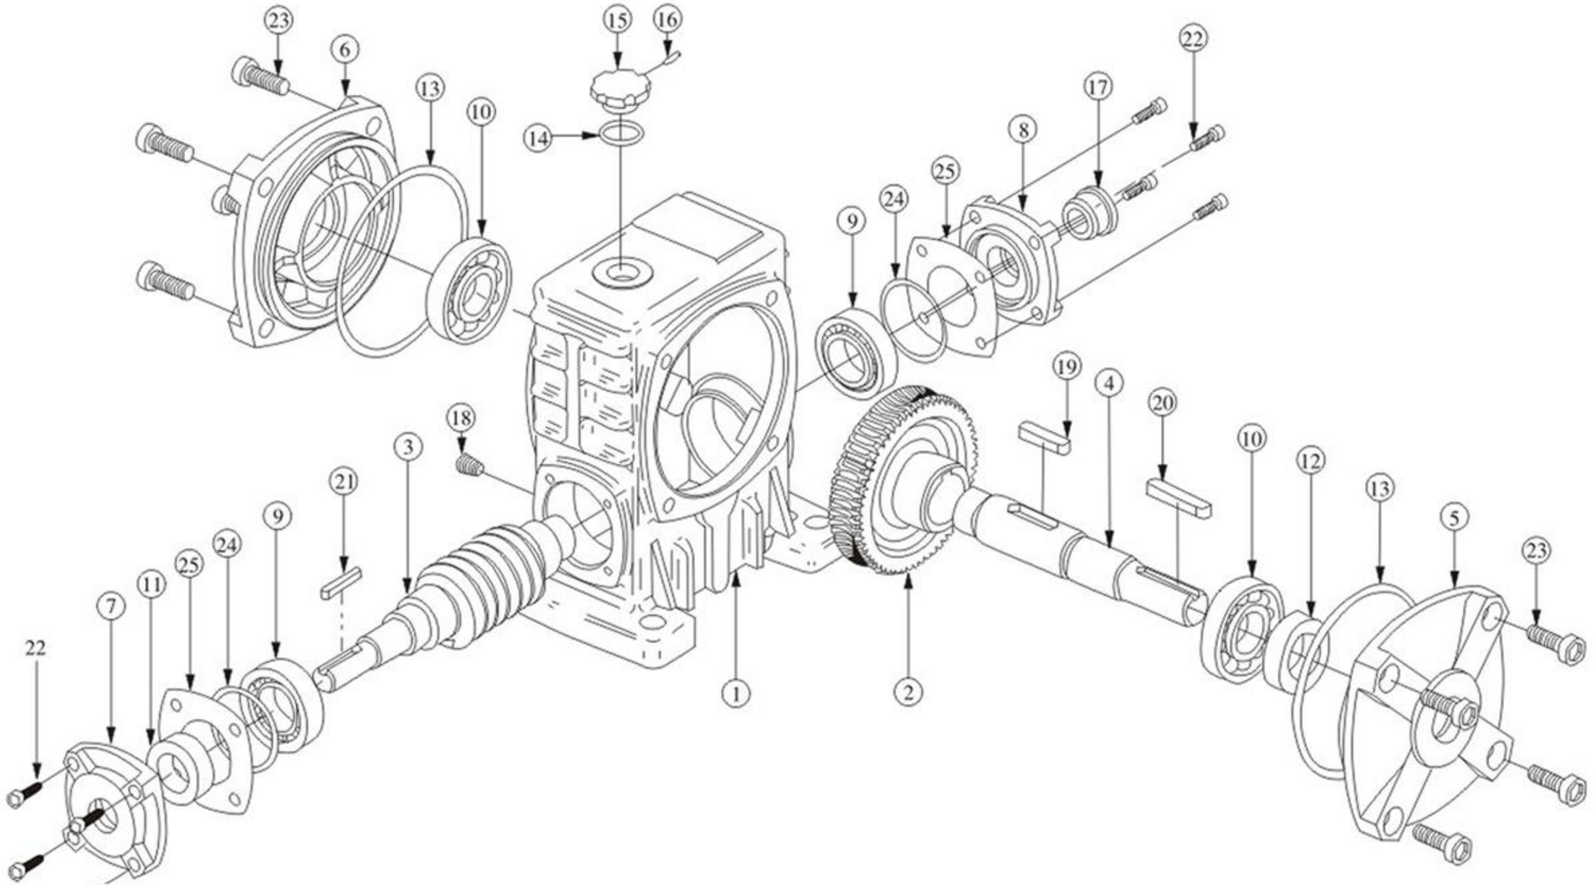


WP单级蜗轮减速机分解图

Worm Gear Speed Reducer Display Drawings


单级WP系列 Single WP series

1 机座 Frame
2 蜗轮 Worm wheel
3 蜗杆轴 Worm shaft
4 出力轴 Output shaft
5 出力盖 Output shaft cover
6 出力盖 Output shaft cover
7 入力盖 Input shaft cover
8 入力盖 Input shaft cover
9 轴承 Bearing
10 轴承 Bearing
11 油封 Oil seal
12 油封 Oil seal
13 O型圈 O ring
14 O型圈 O ring
15 加油盖 Oil hole cover
16 塞子 Pin
17 油标 Oil gauge
18 油塞 Oil plug
19 平键 Key
20 平键 Key
21 平键 Key
22 内六角螺钉 Intl.hex screw
23 内六角螺钉 Intl.hex screw
24 调整圈 Shim
25 密封垫 Gasket

sales@wgt.net.cn

WGT

产品结构图 Product structural drawing

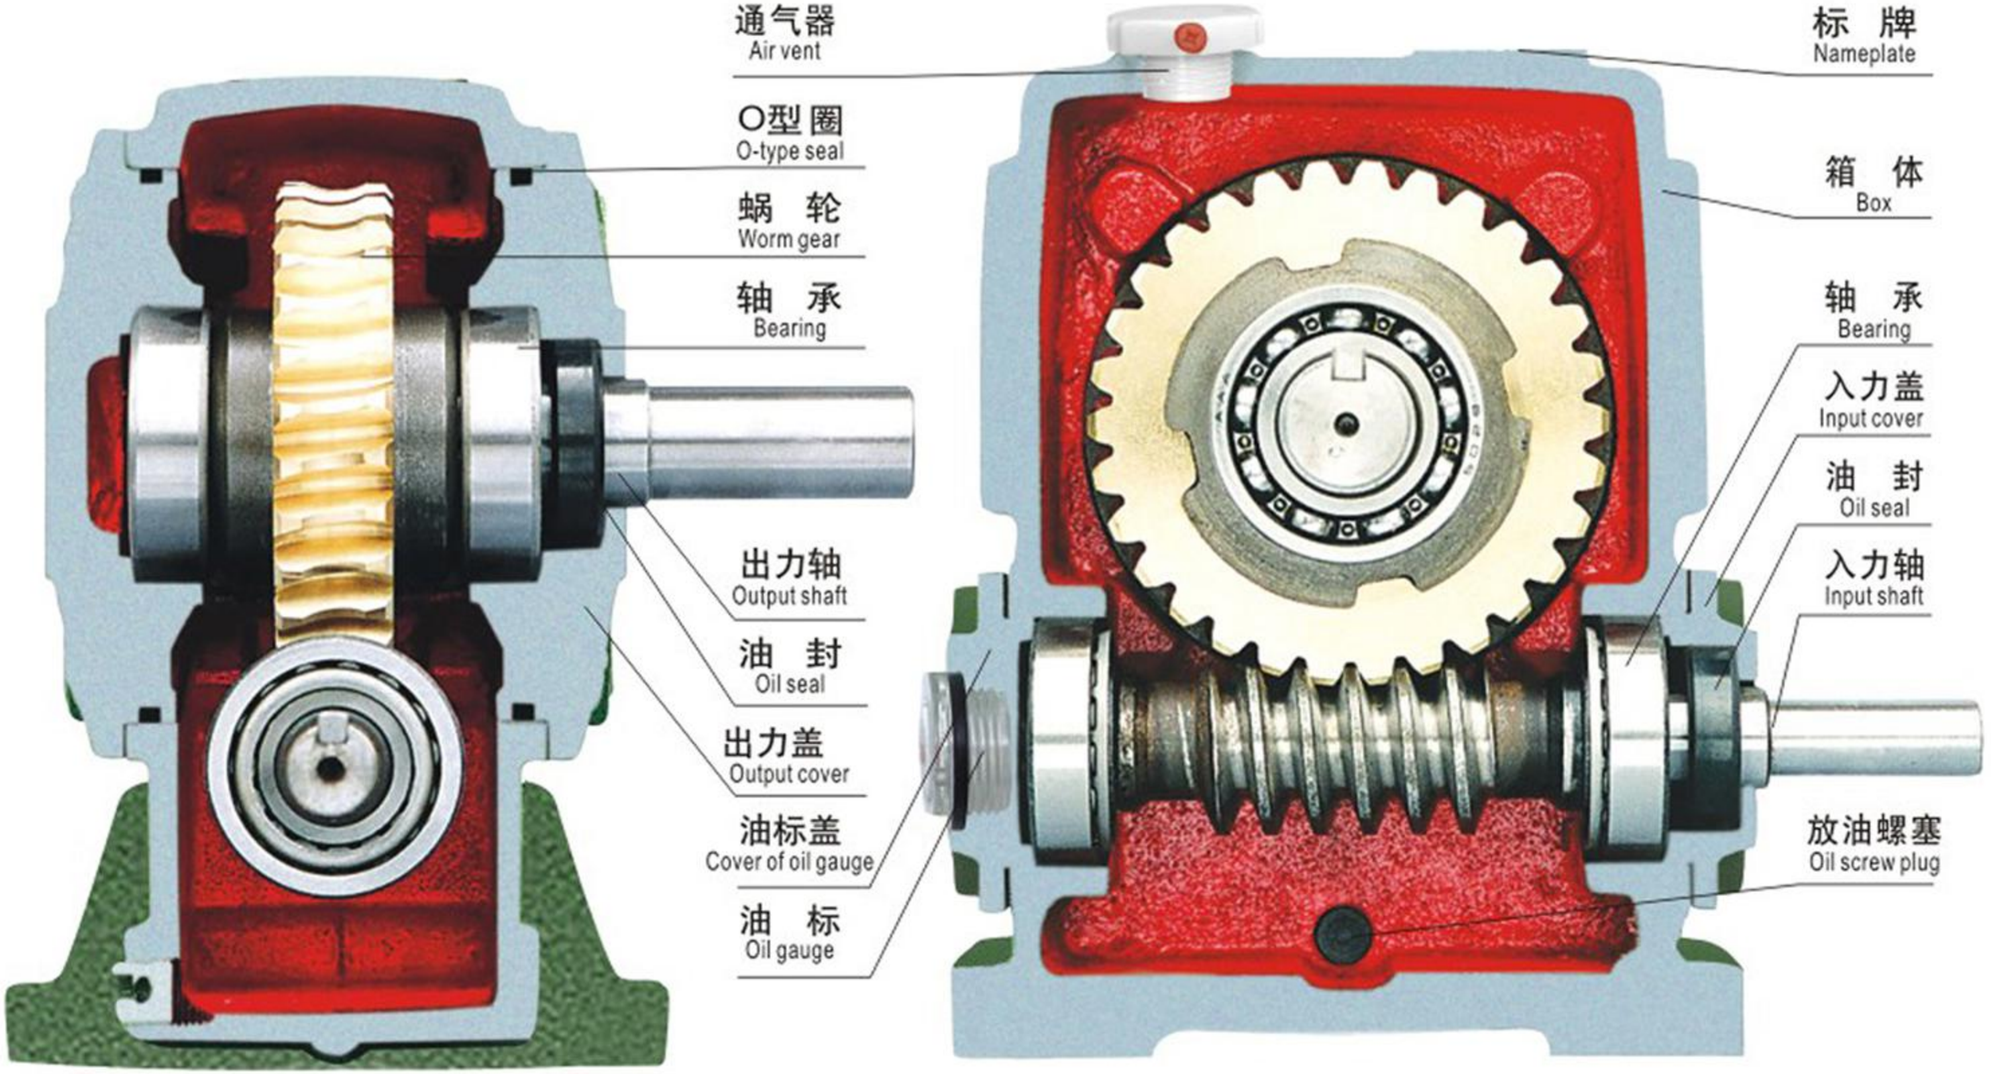

sales@wgt.net.cn

WGT

型号及表示法 Model andstrure table

W	P	W	E	D	K	A	40-250	—	1/10-1/900	—	B

产品代码
W—蜗轮减速机
Product code
W-Worm gear
Speed reducer

箱体结构
P-整体
Box structure
P-whole

箱体形式
W-万能型
无代码-基本型
Box model
W-universal
Non-code-basic

整机结构
E-双级
EE-多级
无代码-基本型
Unit structure
E-Double
EE-Multistage
Non-code-basic

联接方式
D-入轴带电机法兰
无代码-基本型
Connector of input shaft
D-input shaft with motor frange
Non-code-basic

出轴结构
K-中孔出轴
无代码-基本型
Structure of input shaft
K-Hollow Structure
Non-code-basic

箱体结构形式
A-入轴在下　S-入轴在上
O-出轴向上　X-出轴向下
T-入轴向上　V-入轴向下
无代码-基本型
Box structure
Structure of input shaft
A-Input shaft is below
S-Input shaft is above
O-Output shaft is upward
X-Output shaft is downward
T-Input shaft is upward
V-Input shaft is downward
Non-code-basic

中心距
40-250
Center distance
40-250

减速比
1/10-1/900
Ratio
1/10-1/900

轴指向
B
Output shaft direction
B

sales@wgt.net.cn

速比1/100-1/3600



双级减速机


DOUBLE SPEED REDUCER


WPEA 	WPEDA 	WPEKA 	WPEDKA 	WPEO 	WPEDO 
WPES 	WPEDS 	WPEKS 	WPEDKS 	WPEX 	WPEDX 
WPWE 	WPWED 	WPWEKO 	WPWEDKO 	WPEEA 	WPEEDO 
WPWEK 	WPWEDK 	AS  TV  OX 		蜗轮蜗杆 	


sales@wgt.net.cn

WPWEK 型




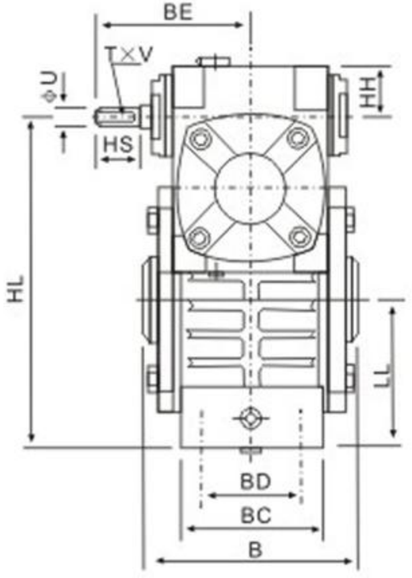



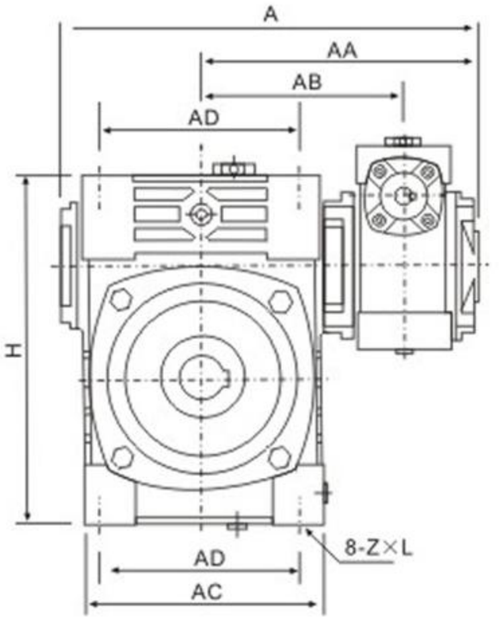

轴指向表示
SHAFT DIRECTION

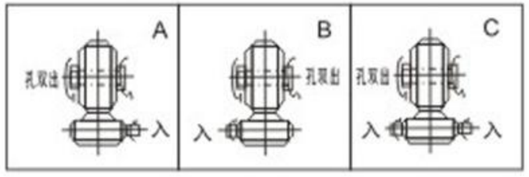


型号 size	减速比 ratio	A	AA	AB	B	BE	AC	BC	AD	BD	HH	HL	LL	H	ZxL	入力轴input hole			出力轴output shaft		重量 weight(kg)
																HS	U	T×V	S	W×Y	
40-70	1/200 1/300 1/400 1/500 1/600 1/800 1/900	262	171	126	132	89	152	86	125	65	35	200	90	215	M10 X25	25	12	4×2.5	30	8×33.3	17
50-80		297	197	144	150	107	169	102	140	70	35	235	105	250	M12X28	30	12	4×2.5	35	10×38.3	28
60-100		363	231	175	174	122	216	117	180	90	42	290	130	310	M12X30	40	15	5×3	40	12×43.3	43
70-120		408	256	193	180	140	256	124	220	100	55	345	155	370	M14X32	40	18	6×3.5	45	14×48.8	64
80-135		471	298	226	214	160	296	147	260	110	65	400	185	425	M16X35	50	22	6×3.5	60	18×64.4	99
100-155		555	354	269	256	190	345	185	280	120	80	458	203	461	M16X35	50	25	8×4	70	20×74.9	136
120-175		598	379	287	282	229	374	192	320	140	95	518	223	521	M16X35	65	30	8×4	80	22×85.4	193
135-200		662	425	318	324	260	412	230	360	150	105	580	245	575	M20X36	75	35	10×5	85	22×90.4	280
155-250		795	510	380	400	302	500	285	420	190	103	705	300	700	M24X42	85	40	12×5	110	28×116.4	442


sales@wgt.net.cn

WGT®


WPEA 型



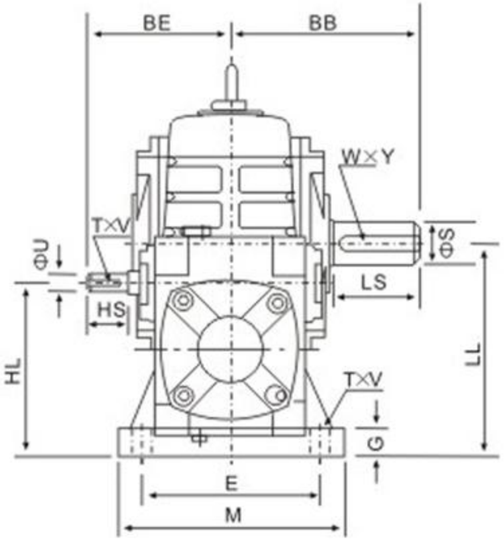

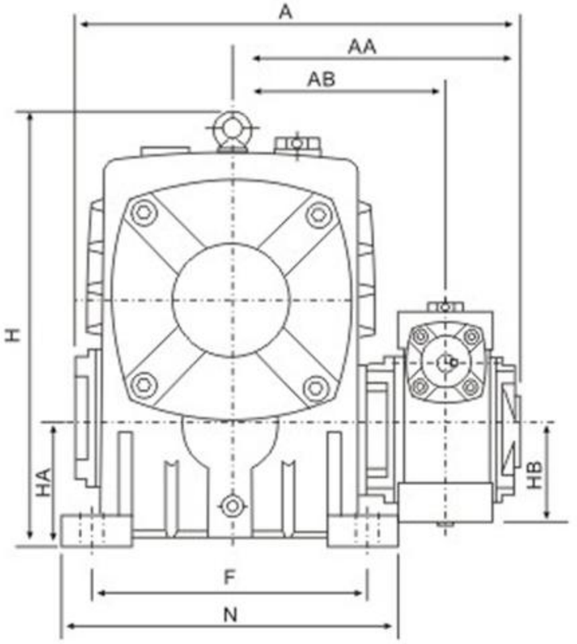

轴指向表示
SHAFT DIRECTION

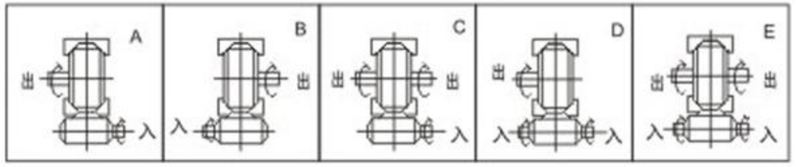



型号 size	减速比 ratio	A	AA	AB	BB	BE	HL	LL	H	HA	HB	M	N	E	F	G	Z	入力轴input hole			出力轴output shaft			重量 weight(kg)
																		HS	U	T×V	LS	S	W×Y	
40-70	1/200 1/300 1/400 1/500 1/600 1/800 1/900	262	171	126	131	89	110	140	236	70	50	150	190	115	150	20	15	25	12	4×2.5	60	28	8×4	20
50-80		297	197	144	142	107	130	160	268	80	65	170	220	135	180	20	15	30	12	4×2.5	65	32	10×5	27
60-100		363	231	175	169	122	160	200	336	100	75	190	270	155	220	25	15	40	15	5×3	75	38	10×5	44
70-120		408	256	193	190	140	190	240	430	120	90	230	320	180	260	30	18	40	18	6×3.5	85	45	14×5.5	73
80-135		471	298	226	210	160	215	270	480	135	105	250	350	200	290	30	18	50	22	6×3.5	95	55	16×6	101
80-147		476	301	229	212	160	203	270	501	123	105	250	350	200	280	32	18	50	22	6×3.5	95	55	16×6	112
100-155		555	354	269	252	190	235	290	531	135	130	275	390	220	320	35	21	50	25	8×4	110	60	18×7	144
120-175		598	379	287	262	229	280	335	600	160	155	310	430	250	350	40	21	65	30	8×4	110	65	18×7	201
135-200		662	425	318	305	260	310	375	666	175	185	360	480	290	390	40	24	75	35	10×5	125	70	20×7.5	293
155-250		795	510	380	360	302	355	450	800	200	203	460	560	380	480	45	28	85	40	12×5	155	90	25×9	462

sales@wgt.net.cn


WPEDA 型



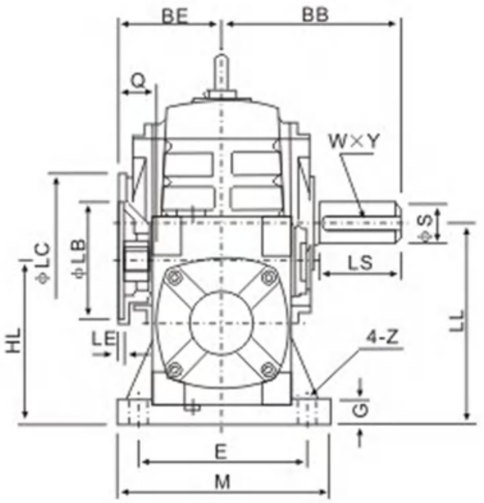

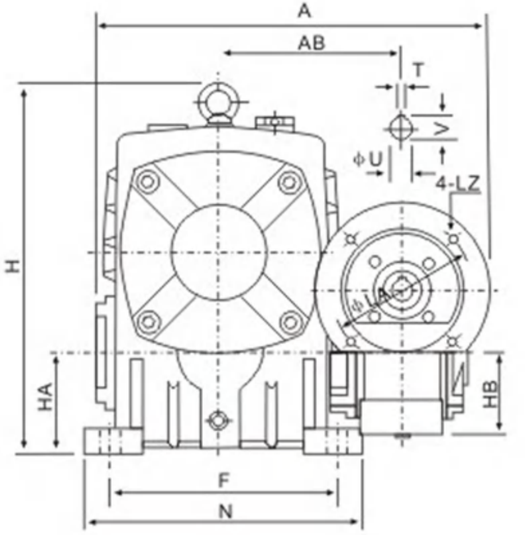

轴指向表示
SHAFT DIRECTION

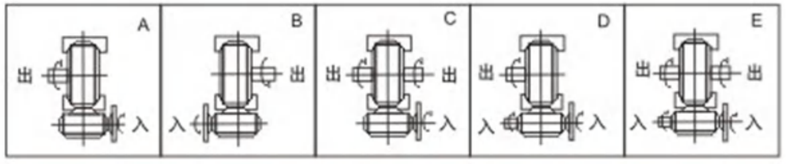



型号 size	入功率 input(KW)	减速比 ratio	A	AB	BB	BE	HL	LL	H	HA	HB	M	N	E	F	G	Z	电机法兰flange					入力孔input hole			出力轴output shaft			重量 weight(kg)
																		LA	LB	LC	LE	LZ	Q	U	T×V	LS	S	W×Y	
40-70	0.12		287	126	131	75	110	140	236	70	50	150	190	115	150	20	15	115	95	140	4	M8	31	11	4×12.8	60	28	8×4	19
50-80	0.18		314	144	142	83	130	160	268	80	65	170	220	135	180	20	15	115	95	140	4	M8	31	11	4×12.8	65	32	10×5	27
60-100	0.37		387	175	169	91	160	200	336	100	75	190	270	155	220	25	15	130	110	160	4	M8	33	14	5×16.3	75	38	10×5	45
70-120	0.37		425	193	190	109	190	240	430	120	90	230	320	180	260	30	18	130	110	160	4	M8	40	14	5×16.3	85	45	14×5.5	75
	0.75	1/200	445			111												165	130	200		M10	42	19	6×21.8				
80-135	0.75	1/300	499	226	210	125	215	270	480	135	105	250	350	200	290	30	18	165	130	200	4.5	M10	48	19	6×21.8	95	55	16×6	103
	1.5	1/400																					52	24	8×27.3				
80-147	0.75	1/500	504	229	212	125	203	270	501	123	105	250	350	200	280	32	18	165	130	200	4.5	M10	48	19	6×21.8	95	55	16×6	114
	1.5	1/600																					52	24	8×27.3				
100-155	1.5	1/800	570	269	252	148	235	290	531	135	130	275	390	220	320	35	21	165	130	200	4.5	M10	52	24	8×27.3	110	60	18×7	147
120-175	2.2	1/900	631	287	262	181	280	335	600	160	155	310	430	250	350	40	21	215	180	250	5	M12	63	28	8×31.3	110	65	18×7	204
	3.0																												
135-200	3.0		680	318	305	202	310	375	666	175	185	360	480	290	390	40	24	215	180	250	5	M12	63	28	8×31.3	125	70	20×7.5	298
	4.0																												
155-250	5.5		815	380	360	247	355	450	800	200	203	460	560	380	480	45	28	265	230	300	5	M12	83	38	10×41.3	155	90	25×9	470

sales@wgt.net.cn


WPEDKA 型



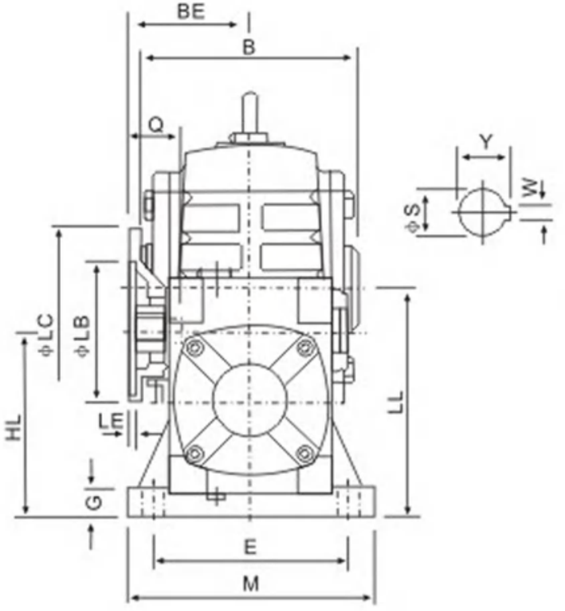

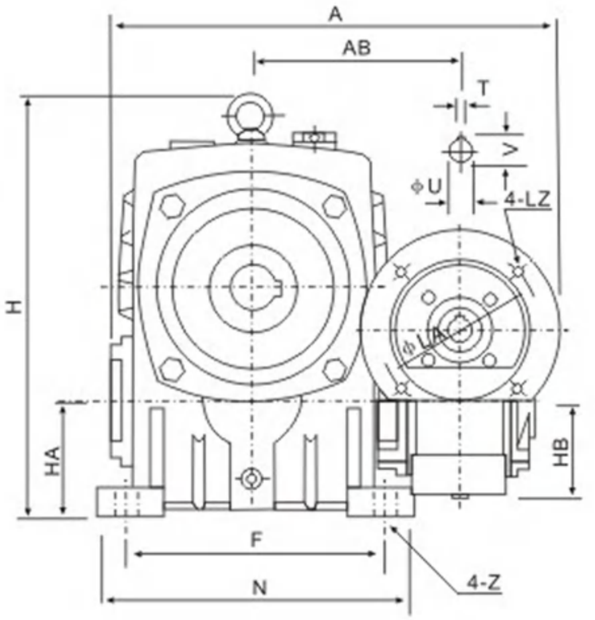

轴指向表示
SHAFT DIRECTION

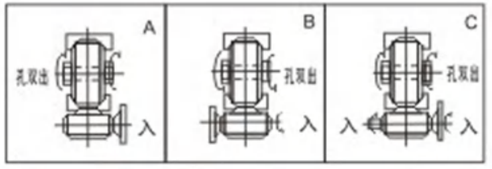


型号 size	入功率 input(KW)	减速比 ratio	A	AB	B	BE	HL	LL	H	HA	HB	M	N	E	F	G	Z	电机法兰flange					入力孔input hole			出力轴output shaft		重量 weight(kg)
																		LA	LB	LC	LE	LZ	Q	U	T×V	S	W×Y	
40-70	0.12	1/200 1/300 1/400 1/500 1/600 1/800 1/900	287	126	132	75	110	140	236	70	50	150	190	115	150	20	15	115	95	140	4	M8	31	11	4×12.8	30	8×33.3	19
50-80	0.18		314	144	150	83	130	160	268	80	65	170	220	135	180	20	15	115	95	140	4	M8	31	11	4×12.8	35	10×38.3	27
60-100	0.37		387	175	174	91	160	200	336	100	75	190	270	155	220	25	15	130	110	160	4	M8	33	14	5×16.3	40	12×43.3	45
70-120	0.37		425	193	180	109	190	240	430	120	90	230	320	180	260	30	18	130	110	160	4	M8	40	14	5×16.3	45	14×48.8	75
	0.75		445			111												165	130	200		M10	42	19	6×21.8			
80-135	0.75		499	226	214	125	215	270	480	135	105	250	350	200	290	30	18	165	130	200	4.5	M10	48	19	6×21.8	60	18×64.4	103
	1.5																						52	24	8×27.3			
100-155	1.5		570	269	256	148	235	290	531	135	130	275	390	220	320	35	21	165	130	200	4.5	M10	52	24	8×27.3	70	20×74.9	147
120-175	2.2		631	287	282	181	280	335	600	160	155	310	430	250	350	40	21	215	180	250	5	M12	63	28	8×31.3	80	22×85.4	204
	3.0																											
135-200	3.0		680	318	324	202	310	375	666	175	185	360	480	290	390	40	24	215	180	250	5	M12	63	28	8×31.3	85	22×90.4	298
	4.0																											
155-250	5.5		815	380	400	247	355	450	800	200	203	460	560	380	480	45	28	265	230	300	5	M12	83	38	10×41.3	110	28×116.4	470


sales@wgt.net.cn

WGT®


WPEDKS 型



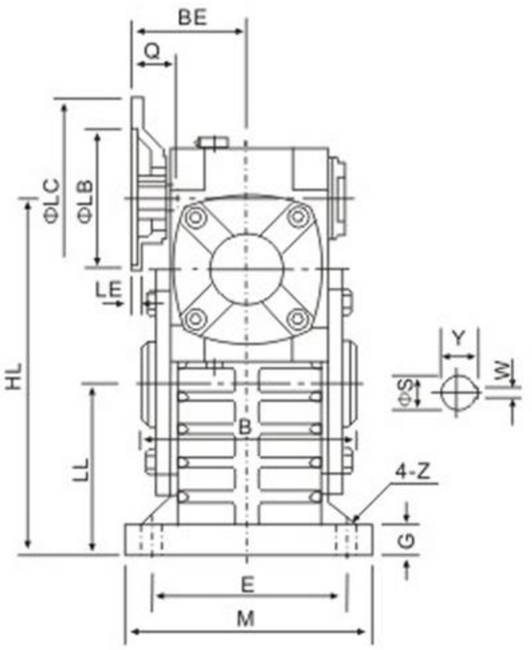

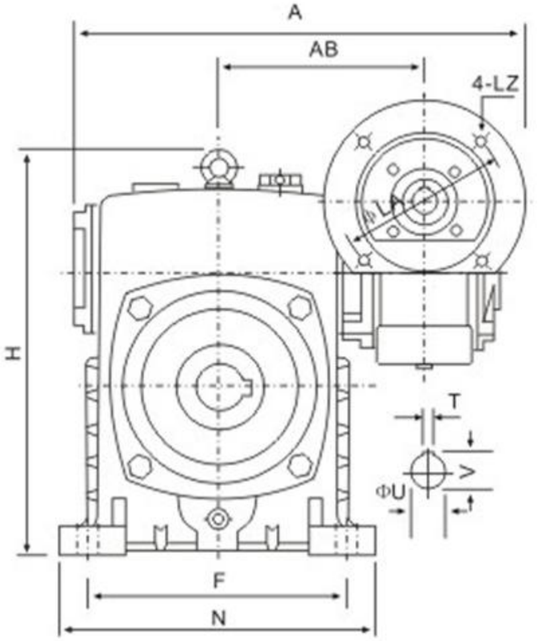

轴指向表示
SHAFT DIRECTION

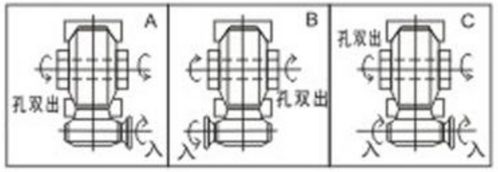

型号 size	入功率 input(KW)	减速比 ratio	A	AB	B	BE	HL	LL	H	M	N	E	F	G	Z	电机法兰 flange					入力孔 input hole			出力轴 output shaft		重量 weight(kg)
																LA	LB	LC	LE	LZ	Q	U	T×V	S	W×Y	
40-70	0.12		287	126	132	75	215	105	238	150	190	115	150	20	15	115	95	140	4	M8	31	11	4×12.8	30	8×33.3	19
50-80	0.18		314	144	150	83	250	120	273	170	220	135	180	20	15	115	95	140	4	M8	31	11	4×12.8	35	10×38.3	27
60-100	0.37		387	175	174	91	310	150	334	190	270	155	220	25	15	130	110	160	4	M8	33	14	5×16.3	40	12×43.3	45
70-120	0.37	1/200	425	193	180	109	370	180	423	230	320	180	260	30	18	130	110	160	4	M8	40	14	5×16.3	45	14×48.8	75
	0.75	1/300	445			111										165	130	200		M10	42	19	6×21.8			
80-135	0.75	1/400	499	226	214	125	430	215	482	250	350	200	290	30	18	165	130	200	4.5	M10	48	19	6×21.8	60	18×64.4	103
	1.5	1/500																			52	24	8×27.3			
100-155	1.5	1/600	570	269	256	148	490	235	541	275	390	220	320	35	21	165	130	200	4.5	M10	52	24	8×27.3	70	20×74.9	147
120-175	2.2	1/800	631	287	282	181	555	260	600	310	430	250	350	40	21	215	180	250	5	M12	63	28	8×31.3	80	22×85.4	204
	3.0	1/900																								
135-200	3.0		680	318	324	202	625	290	677	360	480	290	390	40	24	215	180	250	5	M12	63	28	8×31.3	85	22×90.4	298
	4.0																									
155-250	5.5		815	380	400	247	755	350	824	460	560	380	480	45	28	265	230	300	5	M12	83	38	10×41.3	110	28×116.4	470


sales@wgt.net.cn


WGT


WPEDS 型



轴指向表示
SHAFT DIRECTION

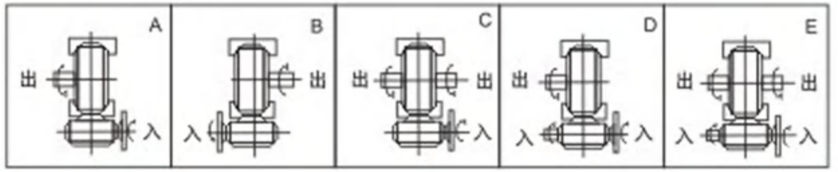

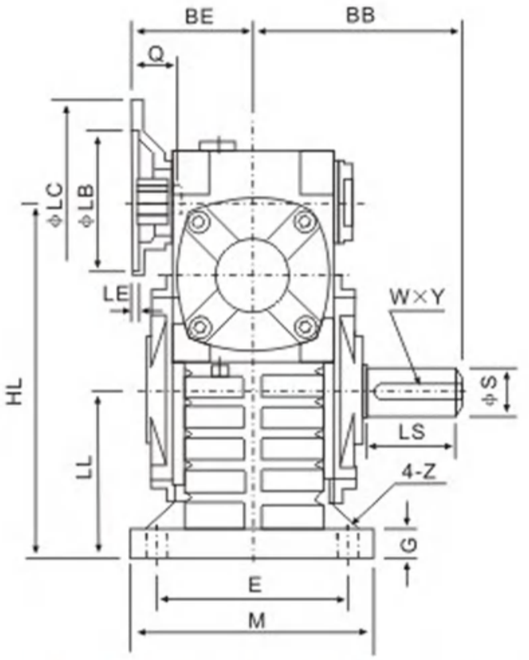

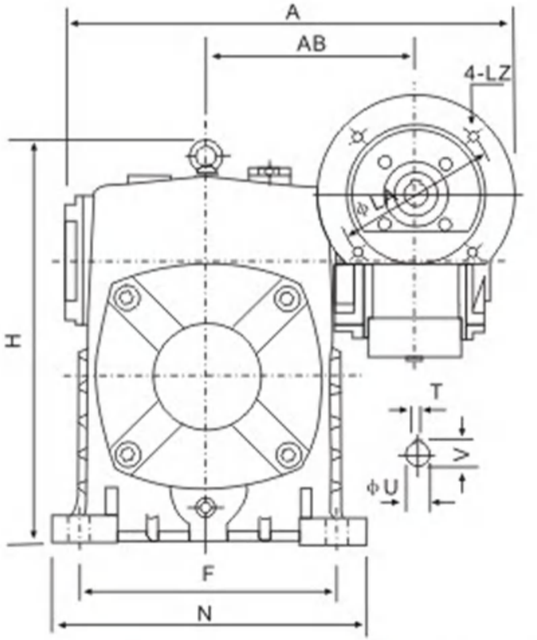

型号 size	入功率 input(KW)	减速比 ratio	A	AB	BB	BE	HL	LL	H	M	N	E	F	G	Z	电机法兰flange					入力孔input hole			输出轴output shaft			重量 weight(kg)
																LA	LB	LC	LE	LZ	Q	U	T×V	LS	S	W×Y	
40-70	0.12		287	126	131	75	215	105	238	150	190	115	150	20	15	115	95	140	4	M8	31	11	4×12.8	60	28	8×4	19
50-80	0.18		314	144	142	83	250	120	273	170	220	135	180	20	15	115	95	140	4	M8	31	11	4×12.8	65	32	10×5	27
60-100	0.37		387	175	169	91	310	150	334	190	270	155	220	25	15	130	110	160	4	M8	33	14	5×16.3	75	38	10×5	45
70-120	0.37		425	193	190	109	370	180	423	230	320	180	260	30	18	130	110	160	4	M8	40	14	5×16.3	85	45	14×5.5	75
	0.75	1/200	445			111										165	130	200		M10	42	19	6×21.8				
80-135	0.75	1/300	499	226	210	125	430	215	482	250	350	200	290	30	18	165	130	200	4.5	M10	48	19	6×21.8	95	55	16×6	103
	1.5	1/400																			52	24	8×27.3				
80-147	0.75	1/500	504	229	212	125	430	203	495	250	350	200	280	32	18	165	130	200	4.5	M10	48	19	6×21.8	95	55	16×6	114
	1.5	1/600																			52	24	8×27.3				
100-155	1.5	1/800	570	269	252	148	490	235	541	275	390	220	320	35	21	165	130	200	4.5	M10	52	24	8×27.3	110	60	18×7	147
120-175	2.2	1/900	631	287	262	181	555	260	600	310	430	250	350	40	21	215	180	250	5	M12	63	28	8×31.3	110	65	18×7	204
	3.0																										
135-200	3.0		680	318	305	202	625	290	677	360	480	290	390	40	24	215	180	250	5	M12	63	28	8×31.3	125	70	20×7.5	298
	4.0																										
155-250	5.5		815	380	360	247	755	350	824	460	560	380	480	45	28	265	230	300	5	M12	83	38	10×41.3	155	90	25×9	470


sales@wgt.net.cn


WPEDX 型




WPEDO 型



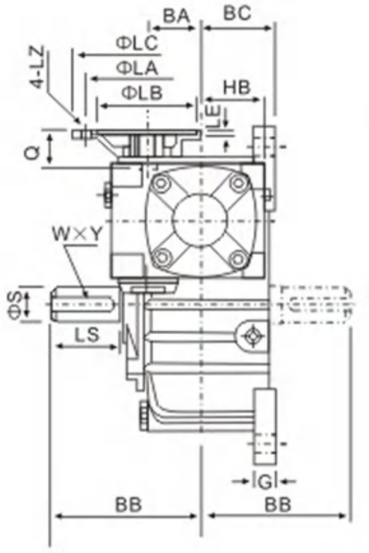


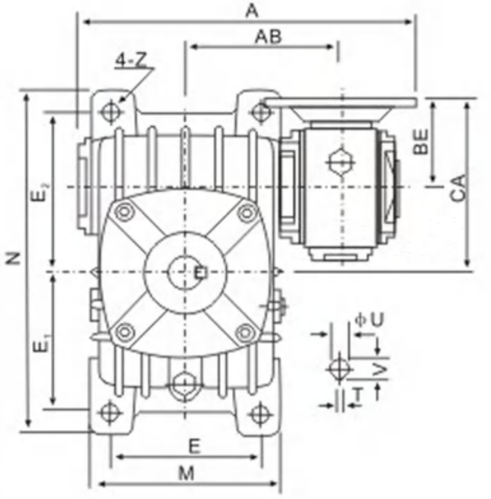

WPEDX轴指向表示
SHAFT DIRECTION

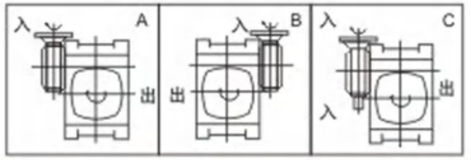

WPEDO轴指向表示
SHAFT DIRECTION

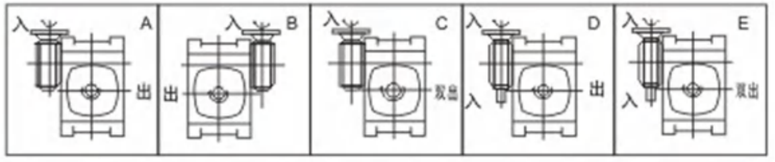


型号 size	入功率 input(KW)	减速比 ratio	A	AB	BA	BB	BC	BE	HB	CA	M	N	E	E_1	E_2	G	Z	电机法兰flange LA	LB	LC	LE	LZ	入力孔input hole Q	U	T×V	出力轴output shaft LS	S	W×Y	重量 weight(kg)
40-70	0.12	1/200 1/300 1/400 1/500 1/600 1/800 1/900	287	126	40	131	65	75	50	145	156	295	120	120	135	20	15	115	95	140	4	M8	31	11	4×12.8	60	28	8×4	19
50-80	0.18		314	144	50	142	70	83	65	163	175	320	140	130	150	20	15	115	95	140	4	M8	31	11	4×12.8	65	32	10×5	27
60-100	0.37		387	175	60	169	90	91	75	191	224	375	190	155	180	26	15	130	110	160	4	M8	33	14	5×16.3	75	38	10×5	45
70-120	0.37		425	193	70	190	100	109	90	229	266	450	220	185	215	30	18	130	110	160	4	M8	40	14	5×16.3	85	45	14×5.5	65
	0.75		445					111		231								165	130	200		M10	42	19	6×21.8				
80-135	0.75		499	226	80	210	110	125	105	260	306	495	260	210	235	30	18	165	130	200	4.5	M10	48	19	6×21.8	95	55	16×6	98
	1.5																						52	24	8×27.3				
80-147	0.75		504	229	80	212	113	125	105	272	310	556	250	254	254	32	18	165	130	200	4.5	M10	48	19	6×21.8	95	55	16×6	114
	1.5																						52	24	8×27.3				
100-155	1.5		570	269	100	252	140	148	130	303	350	590	290	245	295	35	21	165	130	200	4.5	M10	52	24	8×27.3	110	60	18×7	152
120-175	2.2		631	287	120	262	150	181	155	356	394	640	320	267	323	40	21	215	180	250	5	M12	63	28	8×31.3	110	65	18×7	194
	3.0																												
135-200	3.0		680	318	135	305	175	202	185	402	440	710	370	290	360	40	24	215	180	250	5	M12	63	28	8×31.3	125	70	20×7.5	283
	4.0																												
155-250	5.5		815	380	155	360	200	247	203	497	510	860	440	350	440	45	28	265	230	300	5	M12	83	38	10×41.3	155	90	25×9	450


sales@wgt.net.cn


WGT®

WPEKA 型




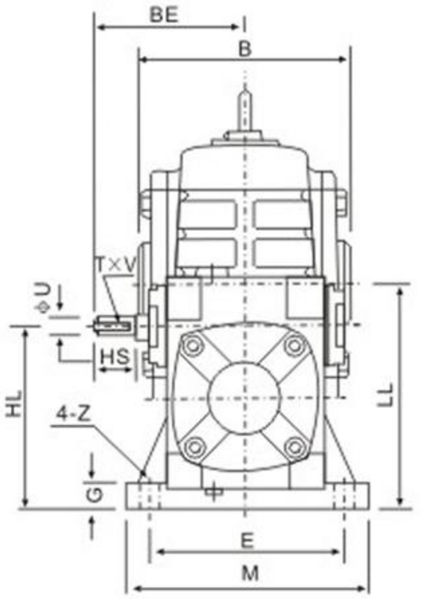



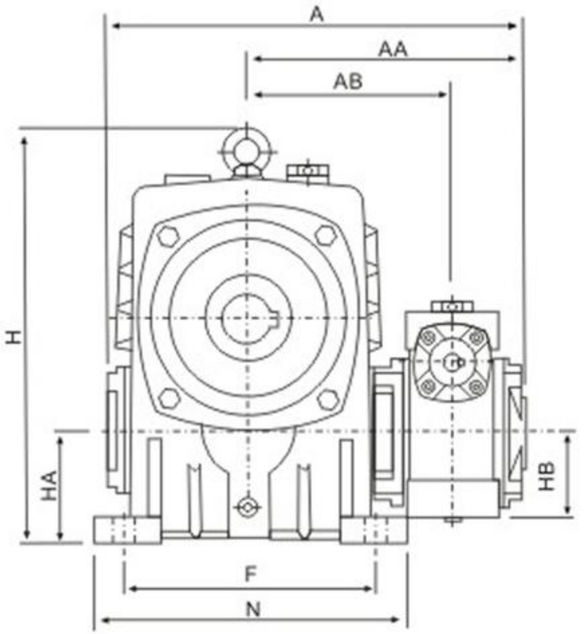

轴指向表示
SHAFT DIRECTION

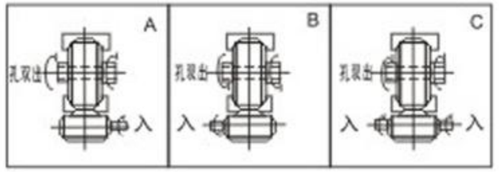


型号 size	减速比 ratio	A	AA	AB	B	BE	HL	LL	H	HA	HB	M	N	E	F	G	Z	入力轴input shaft			出力轴output shaft		重量 weight(kg)
																		HS	U	T×V	S	W×Y	
40-70		262	171	126	132	89	110	140	236	70	50	150	190	115	150	20	15	25	12	4×2.5	30	8×33.3	20
50-80	1/200	297	197	144	150	107	130	160	268	80	65	170	220	135	180	20	15	30	12	4×2.5	35	10×38.3	27
60-100	1/300	363	231	175	174	122	160	200	336	100	75	190	270	155	220	25	15	40	15	5×3	40	12×43.3	44
70-120	1/400	408	256	193	180	140	190	240	430	120	90	230	320	180	260	30	18	40	18	6×3.5	45	14×48.8	73
80-135	1/500	471	298	226	214	160	215	270	480	135	105	250	350	200	290	30	18	50	22	6×3.5	60	18×64.4	101
100-155	1/600	555	354	269	256	190	235	290	531	135	130	275	390	220	320	35	21	50	25	8×4	70	20×74.9	144
120-175	1/800	598	379	287	282	229	280	335	600	160	155	310	430	250	350	40	21	65	30	8×4	80	22×85.4	201
135-200	1/900	662	425	318	324	260	310	375	666	175	185	360	480	290	390	40	24	75	35	10×5	85	22×90.4	293
155-250		795	510	380	400	302	355	450	800	200	203	460	560	380	480	45	28	85	40	12×5	110	28×116.4	462


sales@wgt.net.cn


WGT

WPEKS 型




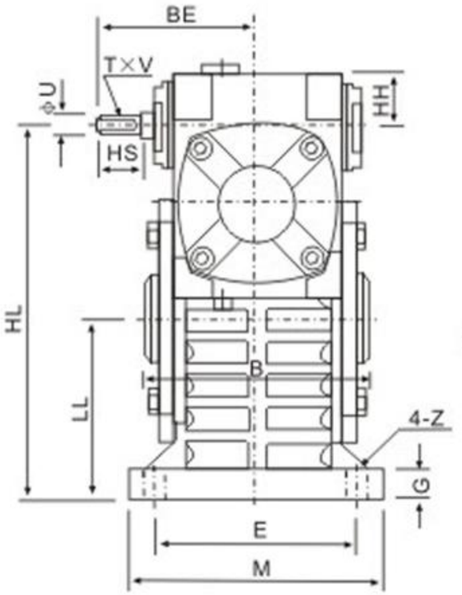



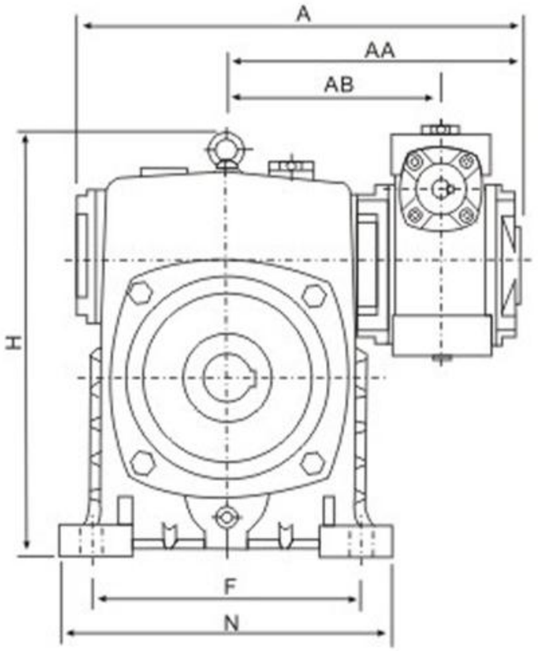

轴指向表示
SHAFT DIRECTION

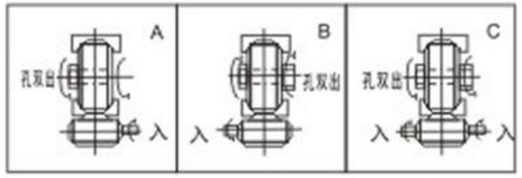


型号 size	减速比 ratio	A	AA	AB	B	BE	HH	HL	LL	H	M	N	E	F	G	Z	入力轴input shaft			出力轴output shaft		重量 weight(kg)
																	HS	U	T×V	S	W×Y	
40-70		262	171	126	132	89	35	215	105	238	150	190	115	150	20	15	25	12	4×2.5	30	8×33.3	20
50-80	1/200	297	197	144	150	107	35	250	120	273	170	220	135	180	20	15	30	12	4×2.5	35	10×38.3	27
60-100	1/300	363	231	175	174	122	42	310	150	334	190	270	155	220	25	15	40	15	5×3	40	12×43.3	44
70-120	1/400	408	256	193	180	140	55	370	180	423	230	320	180	260	30	18	40	18	6×3.5	45	14×48.8	73
80-135	1/500	471	298	226	214	160	65	430	215	482	250	350	200	290	30	18	50	22	6×3.5	60	18×64.4	101
100-155	1/600	555	354	269	256	190	80	490	235	541	275	390	220	320	35	21	50	25	8×4	70	20×74.9	144
120-175	1/800	598	379	287	282	229	95	555	260	600	310	430	250	350	40	21	65	30	8×4	80	22×85.4	201
135-200	1/900	662	425	318	324	260	105	625	290	677	360	480	290	390	40	24	75	35	10×5	85	22×90.4	293
155-250		795	510	380	400	302	103	755	350	824	460	560	380	480	45	28	85	40	12×5	110	28×116.4	462


sales@wgt.net.cn

WGT


WPES 型



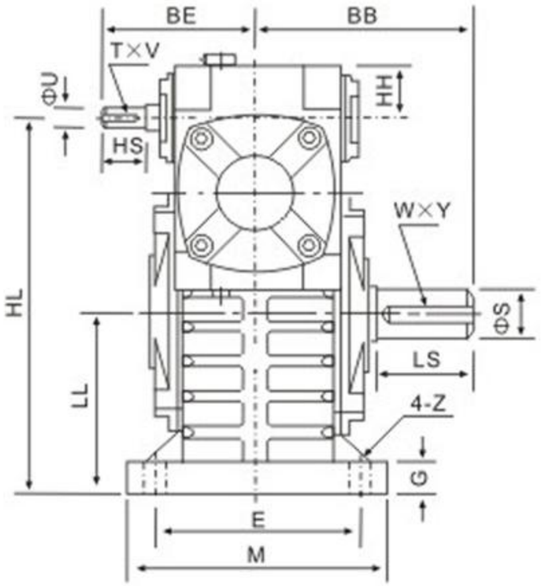

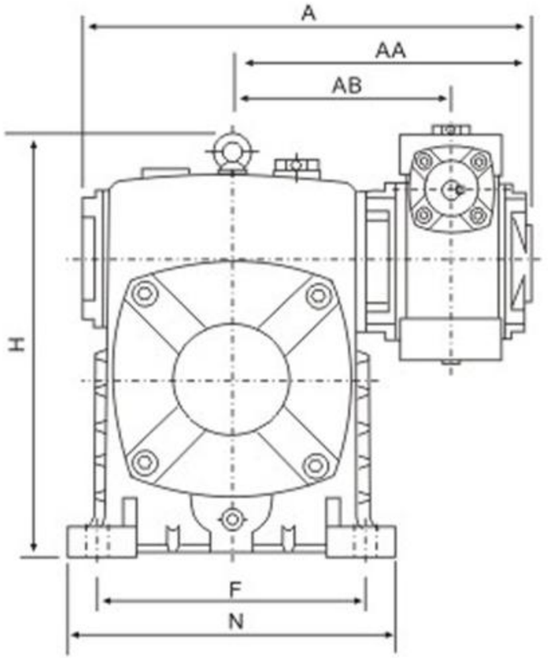

轴指向表示
SHAFT DIRECTION

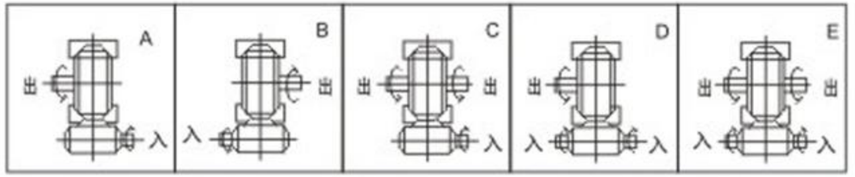

型号 size	减速比 ratio	A	AA	AB	BB	BE	HH	HL	LL	H	M	N	E	F	G	Z	入力轴input hole			出力轴output shaft			重量 weight(kg)
																	HS	U	T×V	LS	S	W×Y	
40-70	1/200 1/300 1/400 1/500 1/600 1/800 1/900	262	171	126	131	89	35	215	105	238	150	190	115	150	20	15	25	12	4×2.5	60	28	8×4	20
50-80		297	197	144	142	107	35	250	120	273	170	220	135	180	20	15	30	12	4×2.5	65	32	10×5	27
60-100		363	231	175	169	122	42	310	150	334	190	270	155	220	25	15	40	15	5×3	75	38	10×5	44
70-120		408	256	193	190	140	55	370	180	423	230	320	180	260	30	18	40	18	6×3.5	85	45	14×5.5	73
80-135		471	298	226	210	160	65	430	215	482	250	350	200	290	30	18	50	22	6×3.5	95	55	16×6	101
80-147		476	301	229	212	160	65	430	203	495	250	350	200	280	32	18	50	22	6×3.5	95	55	16×6	112
100-155		555	354	269	252	190	80	490	235	541	275	390	220	320	35	21	50	25	8×4	110	60	18×7	144
120-175		598	379	287	262	229	95	555	260	600	310	430	250	350	40	21	65	30	8×4	110	65	18×7	201
135-200		662	425	318	305	260	105	625	290	677	360	480	290	390	40	24	75	35	10×5	125	70	20×7.5	293
155-250		795	510	380	360	302	103	755	350	824	460	560	380	480	45	28	85	40	12×5	155	90	25×9	462

sales@wgt.net.cn


WGT®


WPEX 型




WPEO 型



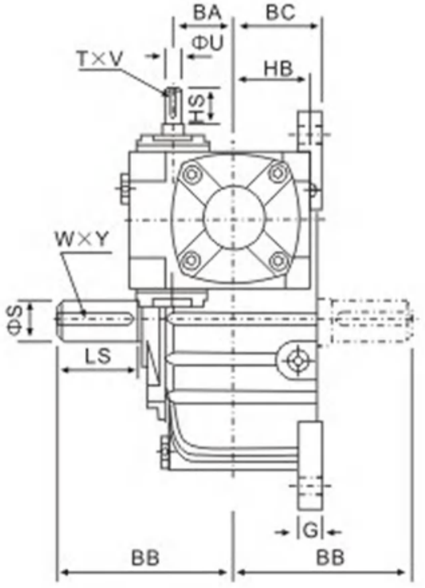


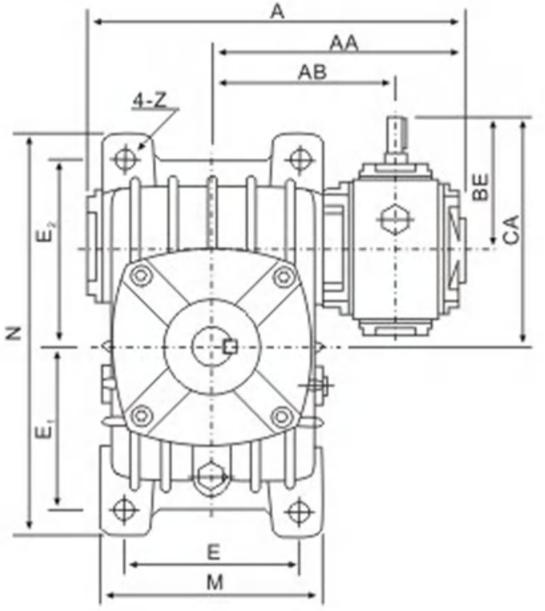

WPEX轴指向表示
SHAFT DIRECTIONV

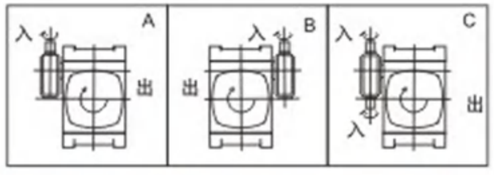

WPEO轴指向表示
SHAFT DIRECTION

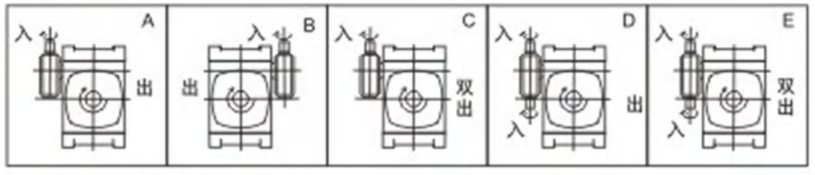



型号 size	减速比 ratio	A	AA	AB	BA	BB	BC	BE	HB	CA	M	N	E	E_1	E_2	G	Z	入力轴input hole			出力轴output shaft			重量 weight(kg)
																		HS	U	T×V	LS	S	W×Y	
40-70	1/200 1/300 1/400 1/500 1/600 1/800 1/900	262	171	126	40	131	65	89	50	159	156	295	120	120	135	20	15	25	12	4×2.5	60	28	8×4	19
50-80		297	197	144	50	142	70	107	65	187	175	320	140	130	150	20	15	30	12	4×2.5	65	32	10×5	27
60-100		363	231	175	60	169	90	122	75	222	224	375	190	155	180	26	15	40	15	5×3	75	38	10×5	44
70-120		408	256	193	70	190	100	140	90	260	266	450	220	185	215	30	18	40	18	6×3.5	85	45	14×5.5	63
80-135		471	298	226	80	210	110	160	105	295	306	495	260	210	235	30	18	50	22	6×3.5	95	55	16×6	96
80-147		476	301	229	80	212	113	160	105	307	310	556	250	254	254	32	18	50	22	6×3.5	95	55	16×6	112
100-155		555	354	269	100	252	140	190	130	345	350	590	290	245	295	35	21	50	25	8×4	110	60	18×7	149
120-175		598	379	287	120	262	150	229	155	404	394	640	320	267	323	40	21	65	30	8×4	110	65	18×7	191
135-200		662	425	318	135	305	175	260	185	460	440	710	370	290	360	40	24	75	35	10×5	125	70	20×7.5	278
155-250		795	510	380	155	360	200	302	203	552	510	860	440	350	440	45	28	85	40	12×5	155	90	25×9	442

sales@wgt.net.cn


WPWE 型



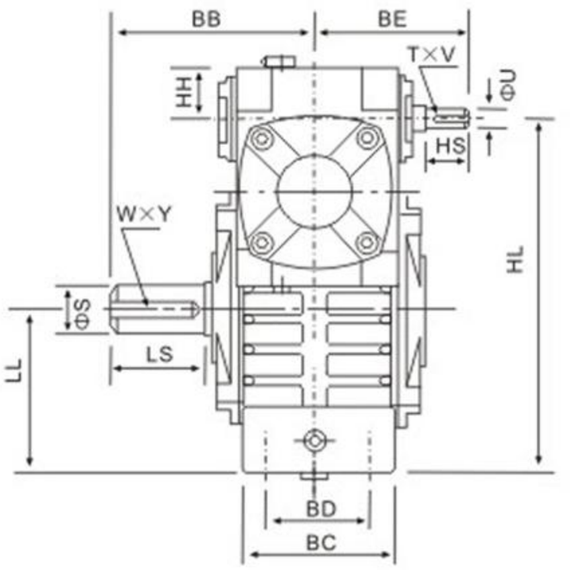

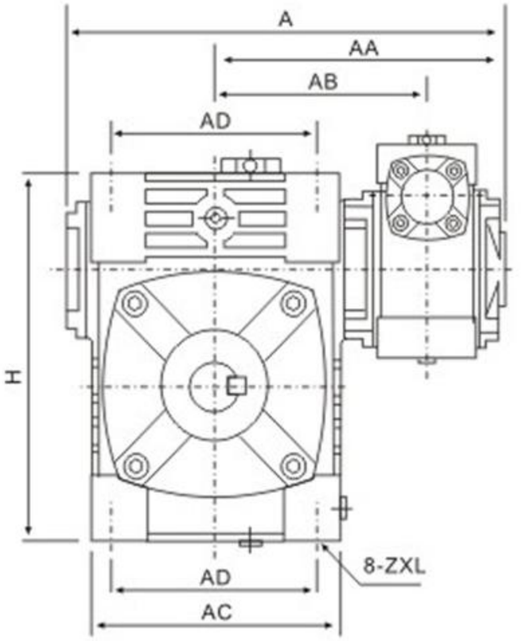

轴指向表示
SHAFT DIRECTION

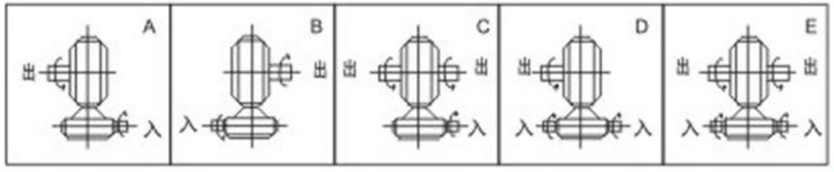



型号 size	减速比 ratio	A	AA	AB	BB	BE	AC	BC	AD	BD	HH	HL	LL	H	ZxL	入力轴input hole			出力轴output shaft			重量 weight(kg)
																HS	U	T×V	LS	S	W×Y	
40-70		262	171	126	131	89	152	86	125	65	35	200	90	215	M10 X25	25	12	4×2.5	60	28	8×4	17
50-80	1/200	297	197	144	142	107	169	102	140	70	35	235	105	250	M12X28	30	12	4×2.5	65	32	10×5	28
60-100	1/300	363	231	175	169	122	216	117	180	90	42	290	130	310	M12X30	40	15	5×3	75	38	10×5	43
70-120	1/400	408	256	193	190	140	256	124	220	100	55	345	155	370	M14X32	40	18	6×3.5	85	45	14×5.5	64
80-135	1/500	471	298	226	210	160	296	147	260	110	65	400	185	425	M16X35	50	22	6×3.5	95	55	16×6	99
100-155	1/600	555	354	269	252	190	345	185	280	120	80	458	203	461	M16X35	50	25	8×4	110	60	18×7	136
120-175	1/800	598	379	287	262	229	374	192	320	140	95	518	223	521	M16X35	65	30	8×4	110	65	18×7	193
135-200	1/900	662	425	318	305	260	412	230	360	150	105	580	245	575	M20X36	75	35	10×5	125	70	20×7.5	280
155-250		795	510	380	360	302	500	285	420	190	103	705	300	700	M24X42	85	40	12×5	155	90	25×9	442

sales@wgt.net.cn


WPWED 型



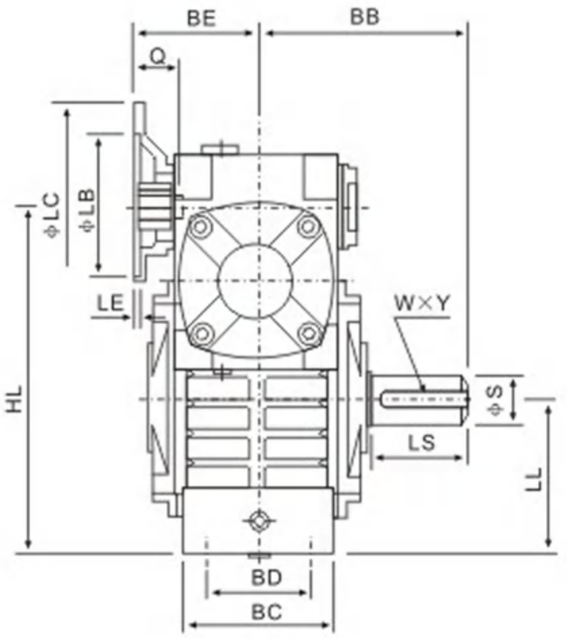

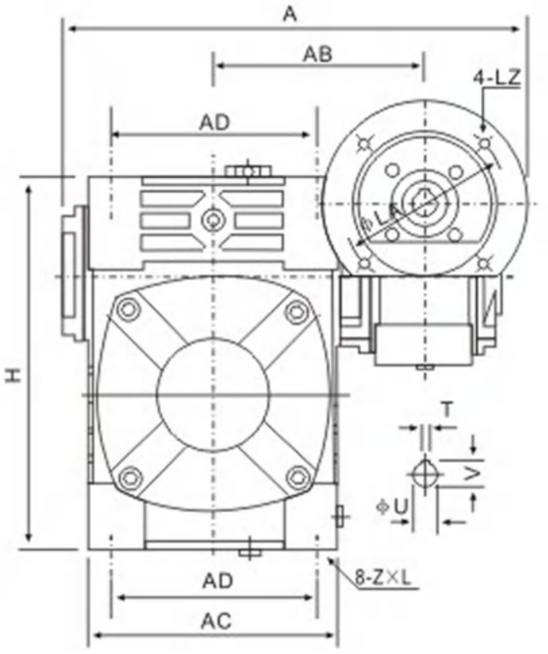

轴指向表示
SHAFT DIRECTION

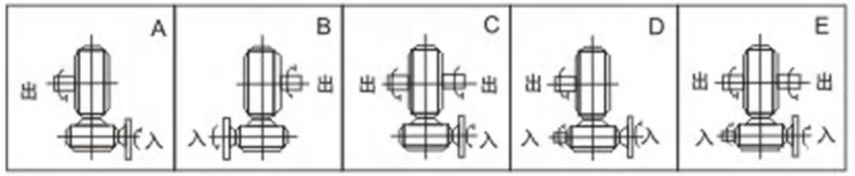


型号 size	入功率 input(KW)	减速比 ratio	A	AB	BB	BE	AC	BC	AD	BD	HL	LL	H	ZxL	电机法兰flange					入力孔input hole			出力轴output shaft			重量 weight(kg)
															LA	LB	LC	LE	LZ	Q	U	T×V	LS	S	W×Y	
40-70	0.12	1/200 1/300 1/400 1/500 1/600 1/800 1/900	287	126	131	75	152	86	125	65	200	90	215	M10 X25	115	95	140	4	M8	31	11	4×12.8	60	28	8×4	17
50-80	0.18		314	144	142	83	169	102	140	70	235	105	250	M12X28	115	95	140	4	M8	31	11	4×12.8	65	32	10×5	28
60-100	0.37		387	175	169	91	216	117	180	90	290	130	310	M12X30	130	110	160	4	M8	33	14	5×16.3	75	38	10×5	44
70-120	0.37		425	193	190	109	256	124	220	100	345	155	370	M14X32	130	110	160	4	M8	40	14	5×16.3	85	45	14×5.5	66
	0.75		445			111									165	130	200		M10	42	19	6×21.8				
80-135	0.75		499	226	210	125	296	147	260	110	400	185	425	M16X35	165	130	200	4.5	M10	48	19	6×21.8	95	55	16×6	101
	1.5																			52	24	8×27.3				
100-155	1.5		570	269	252	148	345	185	280	120	458	203	461	M16X35	165	130	200	4.5	M10	52	24	8×27.3	110	60	18×7	139
120-175	2.2		631	287	262	181	374	192	320	140	518	223	521	M16X35	215	180	250	5	M12	63	28	8×31.3	110	65	18×7	196
	3.0																									
135-200	3.0		680	318	305	202	412	230	360	150	580	245	575	M20X36	215	180	250	5	M12	63	28	8×31.3	125	70	20×7.5	285
	4.0																									
155-250	5.5		815	380	360	247	500	285	420	190	705	300	700	M24X42	265	230	300	5	M12	83	38	10×41.3	155	90	25×9	450


sales@wgt.net.cn

WPWEDK 型



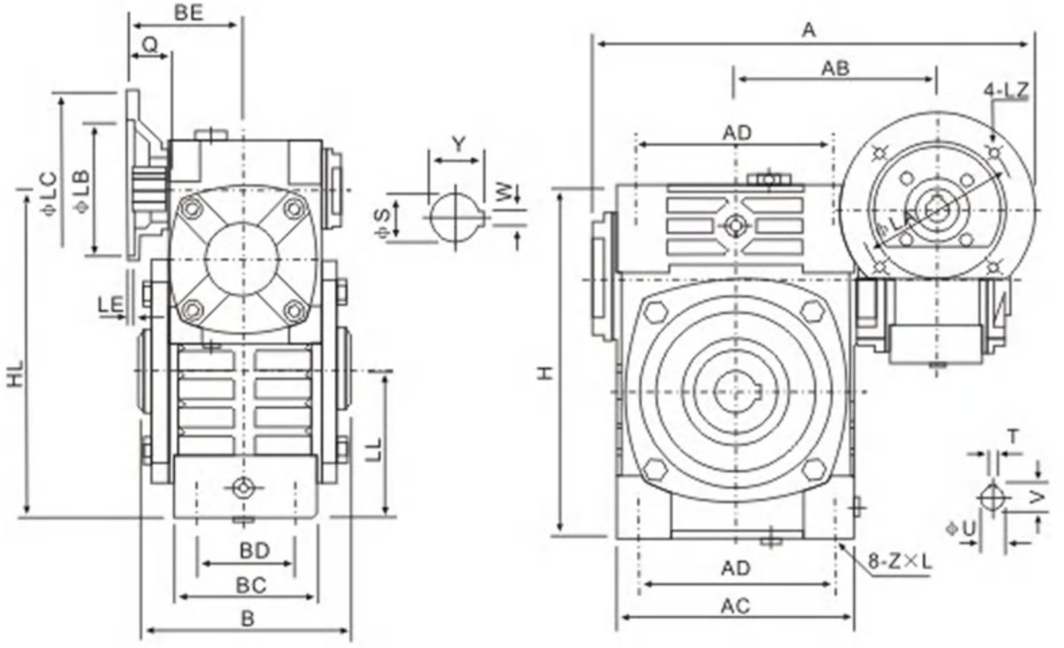

轴指向表示
SHAFT DIRECTION

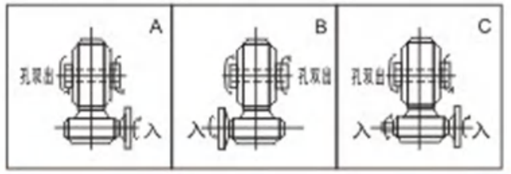

型号 size	入功率 input(KW)	减速比 ratio	A	AB	B	BE	AC	BC	AD	BD	HL	LL	H	ZxL	电机法兰flange					入力孔input hole			出力轴output shaft		重量 weight(kg)
															LA	LB	LC	LE	LZ	Q	U	T×V	S	W×Y	
40-70	0.12		287	126	132	75	152	86	125	65	200	90	215	M10 X25	115	95	140	4	M8	31	11	4×12.8	30	8×33.3	17
50-80	0.18		314	144	150	83	169	102	140	70	235	105	250	M12X28	115	95	140	4	M8	31	11	4×12.8	35	10×38.3	28
60-100	0.37		387	175	174	91	216	117	180	90	290	130	310	M12X30	130	110	160	4	M8	33	14	5×16.3	40	12×43.3	44
70-120	0.37	1/200	425	193	180	109	256	124	220	100	345	155	370	M14X32	130	110	160	4	M8	40	14	5×16.3	45	14×48.8	66
	0.75	1/300	445			111									165	130	200		M10	42	19	6×21.8			
80-135	0.75	1/400	499	226	214	125	296	147	260	110	400	185	425	M16X35	165	130	200	4.5	M10	48	19	6×21.8	60	18×64.4	101
	1.5	1/500																		52	24	8×27.3			
100-155	1.5	1/600	570	269	256	148	345	185	280	120	458	203	461	M16X35	165	130	200	4.5	M10	52	24	8×27.3	70	20×74.9	139
120-175	2.2	1/800	631	287	282	181	374	192	320	140	518	223	521	M16X35	215	180	250	5	M12	63	28	8×31.3	80	22×85.4	196
	3.0	1/900																							
135-200	3.0		680	318	324	202	412	230	360	150	580	245	575	M20X36	215	180	250	5	M12	63	28	8×31.3	85	22×90.4	285
	4.0																								
155-250	5.5		815	380	400	247	500	285	420	190	705	300	700	M24X42	265	230	300	5	M12	83	38	10×41.3	110	28×116.4	450

sales@wgt.net.cn